
Setup Instructions for Winegard CarryOut GM1518 Satellite Antenna^{††} & DISH Receiver

Setup | Installation | Receiver Activation
Software Version L551RGND-N

Setup of Winegard CarryOut GM1518 Satellite Antenna^{††} & DISH Receiver

Setup | Installation | Receiver Activation

Software Version L551RGND-N

INSTRUCTIONS

ESTIMATED SETUP TIME

STEP #1	
----------------	--

Position the Winegard CarryOut satellite antenna and connect the cabling between the satellite antenna and receiver.


IMPORTANT: Ensure that your satellite antenna is connected to a power source, if applicable.

STEP #2	
----------------	--

Power up TV / ViP®211k Receiver / Winegard CarryOut satellite antenna.


STEP #3	
----------------	--

Select 'Menu' from your remote. From the Main Menu page, select '611' on your remote control number pad.

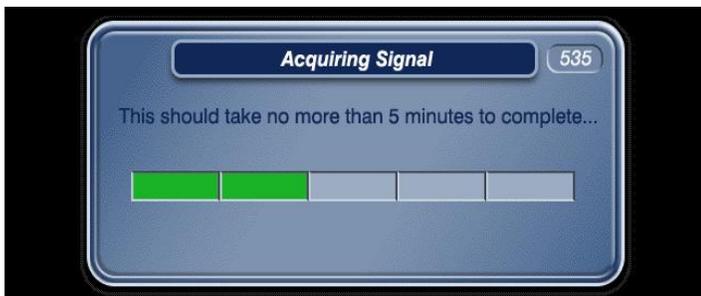


STEP #4	
----------------	--

Select 'Check Switch' with your DISH remote.

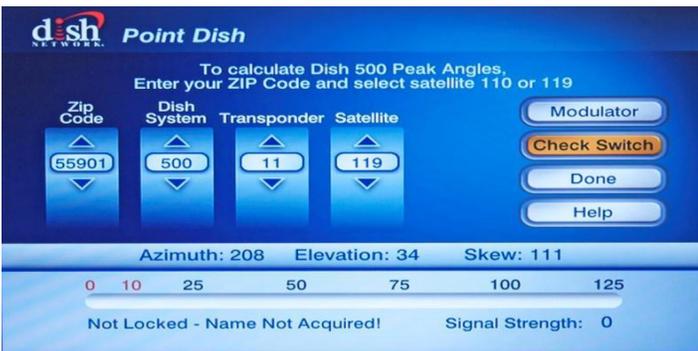

STEP #5	20 MINUTES
----------------	-------------------

Select 'Test' with your DISH remote.

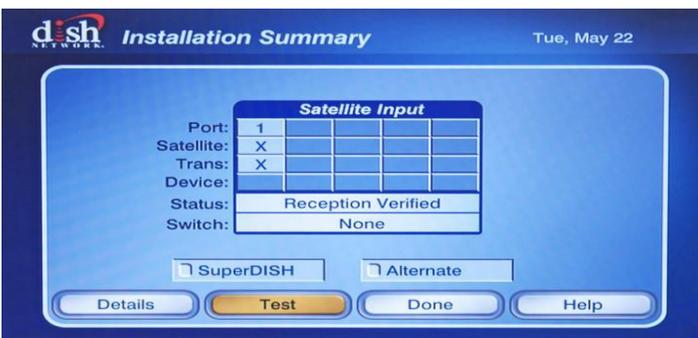

^{††} Also applicable for most automatic roof-mounted satellite antennas. Differences may apply.

STEP #6**3 MINUTES**


Select 'Done' using your DISH remote.




NOTE: If you see an X in the place of the satellite information (110, 119, 129) at this step, reposition your satellite antenna and then select 'Test.'


STEP #7

Select 'Done' on your DISH remote, and then 'Cancel.' Do this three (3) times.

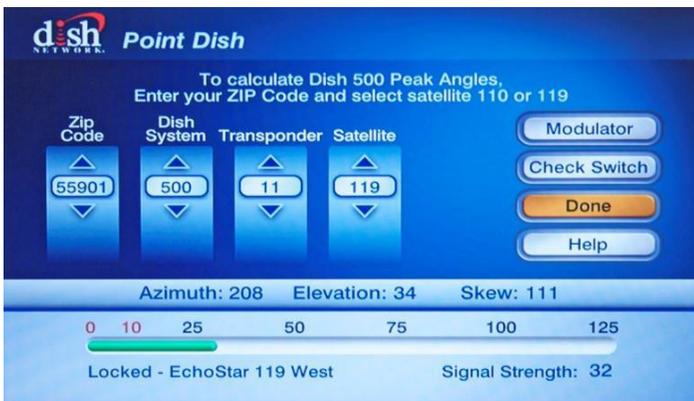
**STEP #8****5 MINUTES**

535 Popup: Acquiring Signal

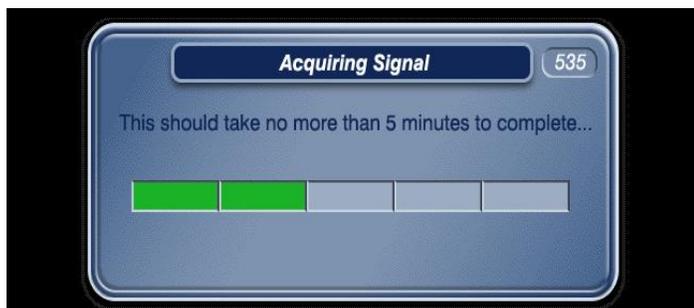

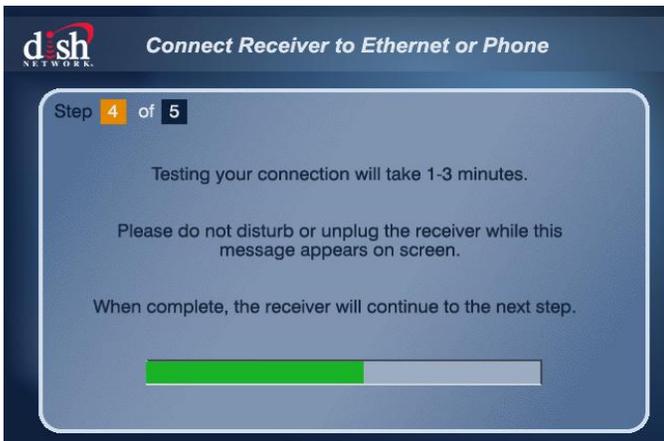STEP #9**3 MINUTES****Installation Wizard: Connect Receiver to Ethernet or Phone – Select ‘Continue’**

NOTE: Connecting Ethernet or Phone is not required; it will automatically sequence through if you choose not to connect.

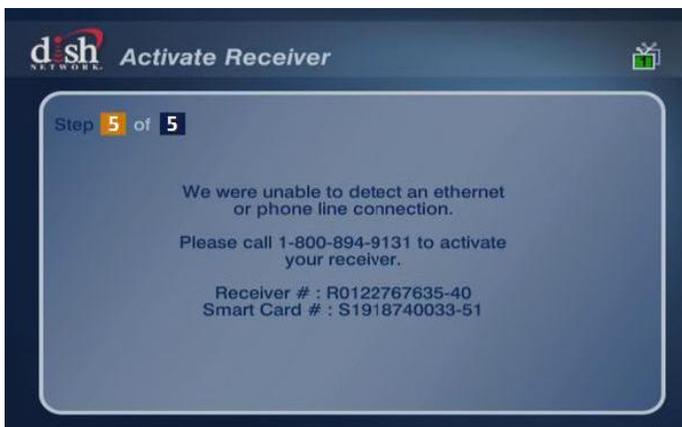STEP #10**10 MINUTES****Installation Wizard: Activate Receiver****First-Time Activation of DISH ViP®211k Receiver**

To activate, call the applicable number listed below.

- New DISH Customers: 1.800.970.9623
- Existing DISH Customers: 1.888.854.9535